

***REALIZE YOUR IDEAS,
SUPPORT YOUR SOLUTIONS.***

	Applications	Span layout (m)	Completion
Cable-stayed Bridge	Korea-Myanmar Friendship (DALA) Bridge, Myanmar	160+370+160	Under construction
	Lupar 1 Bridge, Malaysia	137.2+324.4+137.2	Under construction
	Sejingkat Bridge, Malaysia	200+400+200	Under construction
	Bintulu Jepak bridge, Malaysia	108.4+267.6+108.4	2025
	Wuxuan Qianjiang Bridge, China	618	2024
	Nguyen Tat Thanh Bridge, Vietnam	80+100	2024
	Yangmeizhou Bridge, Hunan, China	658	2024
	Zuari Bridge, India	360	2023
	Jinmen Bridge, China	200	2022
	Rod El-Farag Bridge, Egypt	120+300+120	2019
	Lego Land Bridge, South Korea	200	2018
	Yachihe River Bridge, China	220+800+220	2016
	Beipanjing Bridge, China	720	2016
	Kigamboni Bridge, Tanzania	100+200+100	2016
			
	The Danube Bridge on the Novi Sad-Ruma Expressway, Serbia	134 + 235 + 134	Under construction
Extradosed Cable Bridge	Davao River Bridge, Philippines	55+4x90+55	Under construction
	Senqu Bridge, Lesotho	50x15+100	Under construction
	The 5th Thai-Laos Friendship Bridge	90+150+150+150+90	Under construction
	J.P. Magufuli Bridge, Tanzania	100+160+160+100	2025
	The Yellow River Dongming Highway Bridge, China	75+7x120+75	2025
	Wujiang River Bridge, China	153+296+153	2024
	Hefei-Xinyi High-Speed Railway Huaihe River Bridge, China	12+228+112	2024
	Liujiang Yujiang Bridge, China	41+109+320+109+41	2024
	Taiping Lake Bridge, China	48+118+228+118+48	2024
	Abay River Bridge, Ethiopia	72+3x120+72	2024
	Koh Pich - Koh Norea Bridge, Cambodia	100+180+100	2023
	New Chroy Changva Bridge, Cambodia	85+125x4+85	2023
	New Selander Bridge, Tanzania	108+180+10	2022
	Pairst Bridge, Bangladesh	115+2x200+115	2021
	Tapi Bridge, India	75+150+75	2019
			



LIUZHOU OVM MACHINERY CO.,LTD.
No.1, Yanghui Road, Yanghe New Industrial Area,
Liuzhou, Guangxi, 545006, P.R.China
Tel: +86 772 3116402 Fax: +86 772 3118665
sales@ovm.cn
<http://www.ovm.cn>

Contents in this brochure are subject to review and amendment without further notice.



LIUZHOU OVM MACHINERY CO.,LTD.
www.ovm.cn

Contents

OVM Profile	01
OVM Multi-strand Stay Cable System	02
OVM250 Stay Cable Structure	03
OVM Stay Cable	04
Durable Anti-corrosion Protection	04
Stay Cable Vibration Controlling	05
OVM250 Stay Cable Anchorage	06
Tests	07
OVM250 Main Data	09
OVMAT Stay Cable System for Extradosed Bridges	11
OVMAT Main Data	13
Installation	14
Monitoring	16
Applications	17

Certifications of OVM



Kigamboni Bridge, Tanzania

OVM Profile

OVM Leads China's Prestressing Industry

With nearly 60 years of experience, OVM is a leading product supplier and specialist contractor in China in the field of prestressing and other special construction techniques. OVM has a high reputation for reliability, professionalism and innovation. Its series technology and products have been successfully applied in many projects such as bridges, highways, high-speed railways, buildings, dams, nuclear power plants and LNG, and have received worldwide recognition.

Powerful R&D Capabilities

More than 5% of our annual turnover is invested in technical R&D as a fundamental company strategy. OVM owns a national technology center and a postdoctoral research workstation, and it maintains close cooperative relationships with many renowned universities and institutions in China. By 2024, OVM had obtained 1579 technical patents.

Full range of products

OVM focuses on developing outstanding prestressing technology and building up renowned brand in civil engineering field. As the biggest supplier in China, OVM provides full range of prestressing system including 5 categories, 30 series and more than 420 types of products:

I.OVM Post-tensioning Systems

II.OVM Cable Systems

III. OVM Construction Solutions (Incremental Launching, turning and heavy lifting)

IV. OVM Bearings & Expansion Joints

V.OVM Monitoring Systems

Certified management and products

OVM's product reliability stems from its exceptional management. It holds ISO 9001-2015 Quality Management System certification from BSI and CQC. Every stage of production, from raw material procurement to delivery, is strictly governed by this system. OVM comply products with major standards including AASHTO, ASTM, BS, EN, ETA, FIP, GB, JIS, and PTI. Additionally, OVM collaborates closely with external, independent bodies to ensure thorough product testing and continuous improvement.

Your reliable partner

With worldwide network, OVM strives continually to provide high quality services to clients and is seeking partnerships in areas of prestressing design for structural engineering projects, provision of prestressing systems, and contracting of special structures.



OVM Multi-strand Stay Cable System

OVM provides complete and innovative stay cable solutions for cable-stayed and extradosed bridges, covering design, manufacturing, installation, monitoring and maintenance. By 2024, OVM multi-strand stay cable system has been applied to 400+ cable-stayed bridges and extradosed bridges.

The OVM multi-strand stay cable system consists of compact anchorages at both ends, multiple PE-coated galvanized or epoxy-coated high-strength strands, outer HDPE pipes, dampers (or deflectors), an optional monitoring system and other components. It meets industry standards such as fib bulletin 30/89, Setra CIP and PTI recommendations.

Excellent Fatigue Resistance

Passed 2 million cycles of testing at an upper stress of 0.45GUTS and a stress amplitude of 250MPa. The design minimizes steel-to-steel contact, reducing stress concentration and fretting fatigue.

Outstanding Corrosion Protection

Individual strands have three - layer corrosion protection, in line with the "reference system" of fib bulletin 30/89. Wax filling in anchorages and UV-resistant HDPE pipes further enhance durability.

Water-tightness of Anchorages meets fib bulletin 30/89, Setra CIP and PTI recommendations.

Ease of Installation and Maintenance

Individual strand installation and stressing simplify adjustments. Real-time monitoring and easy strand replacement minimize traffic disruption and the need for heavy equipment.




BINTULU – JEPAK Bridge, Malaysia

OVM250 Stay Cable Structure

OVM250 stay cable system can be divided into three parts.

- Anchorage zone - anchorage, wax filler, anchor cap
- Transition Zone - damper (deviator), collar, telescopic device, waterproof cap
- Free length-PE sheathed strands and outer HDPE pipe

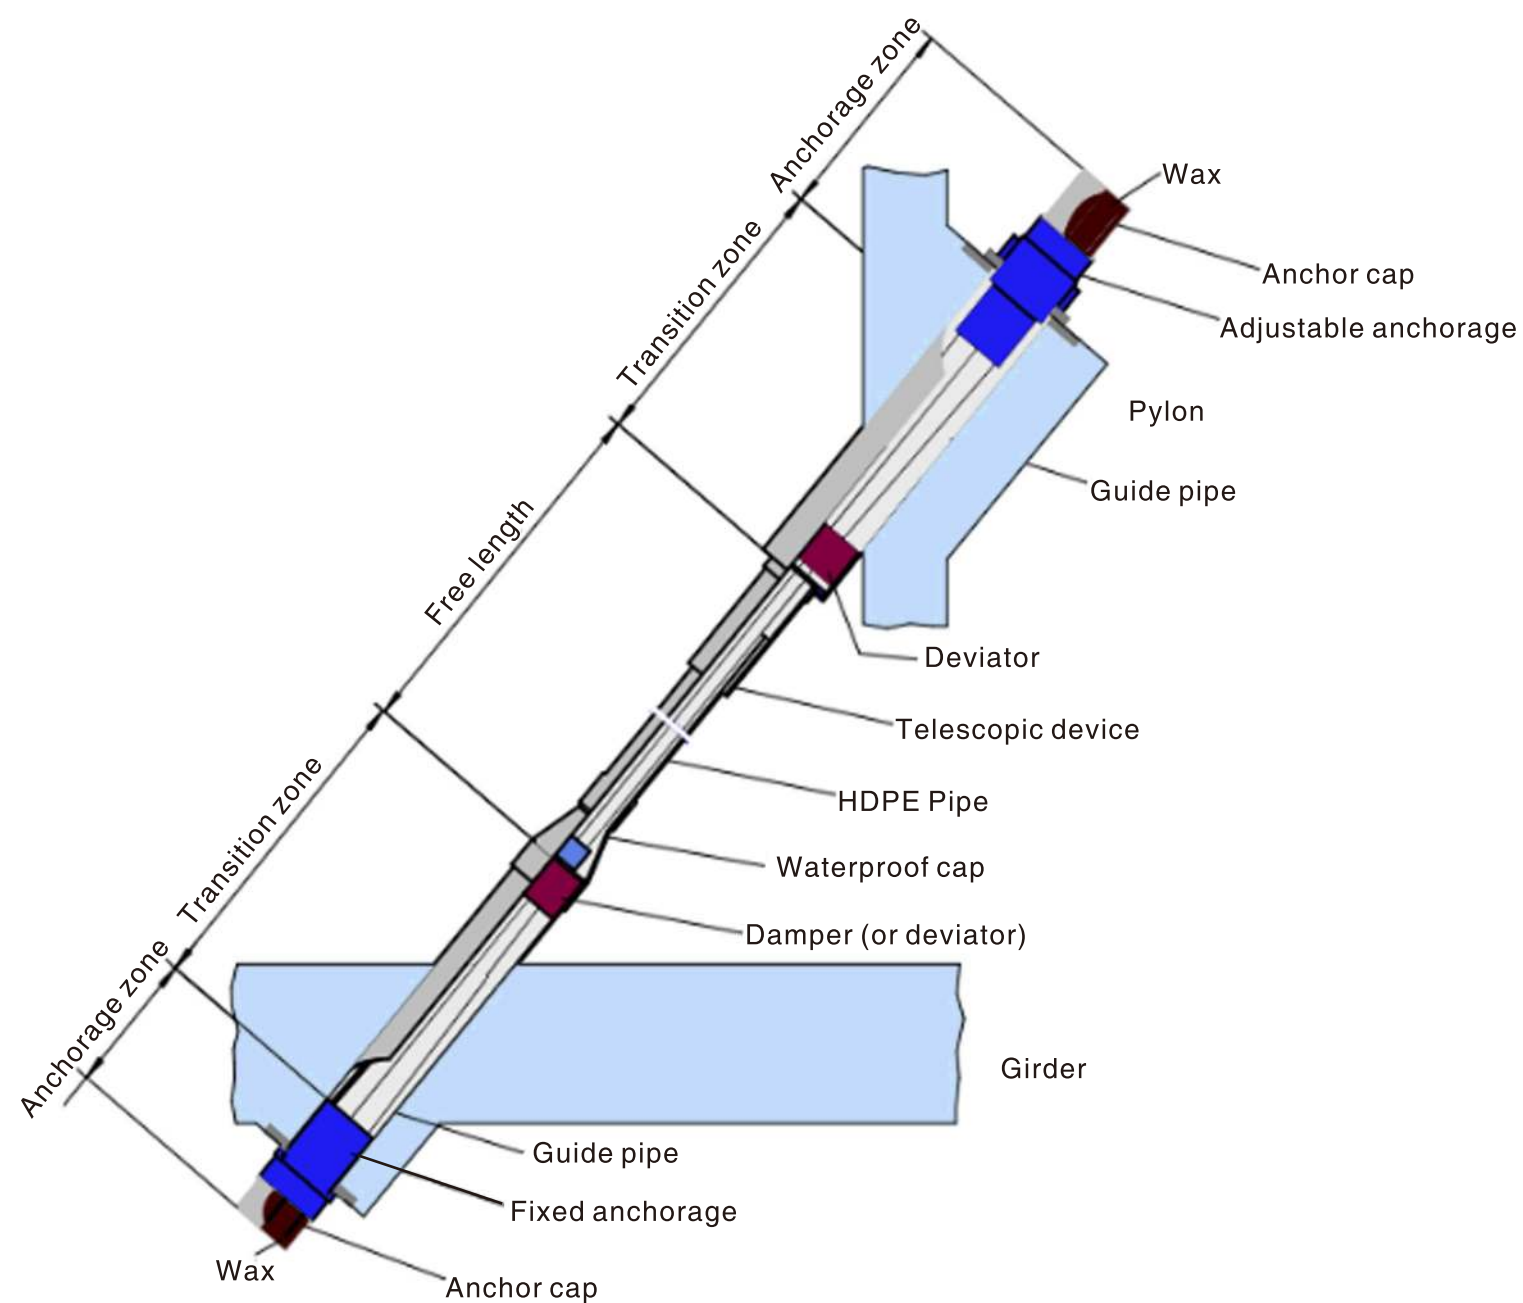

(Adjustable anchorage could be alternatively placed at deck or pylon as per actual bridge project demand)


OVM Stay Cable

The cable consists of a bundle of individual PE sheathed, low relaxation, galvanized or epoxy-coated strands, with the void between the strand and PE sheath filled by anti-corrosive wax.



HDPE pipe


The outer stay pipe is a double-layer HDPE pipe with double helical ribs, which is the outermost protection for the cable. The co-extrusion of a second color on the external surface and the special treatment of the outer layer are for increased UV resistance and aesthetic purposes. The helical ribs are for mitigating the vibrations induced by rain and wind.

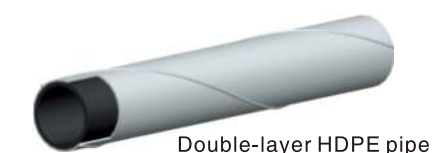

Durable Anti-corrosion Protection

Durable Anti-corrosion Protection

The anchorage surface is anti-corrosively treated, and the whole anchorage assembly are waterproof, and fulfill requirements in the CIP, fib and PTI recommendations.



Stay Cable Vibration Control

Vibration is hazardous to the stay cables. Therefore, it is necessary to properly constrain the vibrational behavior of the stay cables during their lifetime.

The cable vibrations may be due to the following main causes.

- Parametric excited resonance(due to Vehicle/Structure)
- Wind excited vibration(e.g.Vortex/Wake/Chattering/Galloping)
- Rain-wind induced vibration

The most effective solution for vibration control is to increase the structural damping of the stay cable. The following measures are commonly performed to control cable vibrations:

- **Manufacture Double helical ribs on the surface of the HDPE pipe:**
Double helical ribs can effectively reduce the cable's aerodynamic drag coefficient and disturb the rainwater to form rivulets on the cable, and they are thus particularly effective against rain-wind induced vibrations.
- **Install high-damping rubber damperat the entrance of the guide pipe:**
The damping unit, the most important component of the damper, is made of high-damping rubber and can significantly control cable vibrations.
- **Install built-in viscous shear damper (VSD) at guide pipe entrance.**
Viscous shear dampers are designed and fabricated by applying the viscous drag principle. The cable vibrations can be significantly controlled by the viscous resistance generated through shear action of relatively parallel movements of the staggered baffles immersed in the viscous damping medium.
- To Install an external permanent magnet adjustable magnetorheological damper at the free length of the stay cable. The magnetorheological fluid provides the damping force and the permanent magnet functions adjustment and controlling behavior. The damper can afford a sufficient and adjustable damping force on the stay cable for optimal damping performance.

▼ High Damping Rubber Damper



Viscous Shear Damper(VSD) ▶





Permanent Magnet Adjustable Magnetorheological Damper ▶

OVM250 Stay Cable Anchorage

Main Advantages

- OVM250 stay cable anchorage consists of Adjustable-end anchorage and fixed-end anchorage.
- Strand is stressed and anchored by wedge individually. Cable load is successively transferred through the nut (adjustable-end) and anchor plate (Fixed0-end) to structure.
- Adjustable-end anchorage is fitted by a ring nut on the socket. It could be alternatively placed at upper or lower sides according to actual engineering requests.
- Except for wedges being seated in and rigidly contacting the conical holes of the anchor plate, there are no other rigid contact points along the full length of the cable. This avoids fretting fatigue and significantly enhances the entire system fatigue performance.
- The adjustable-end anchorage allows an adjustment of the cable length (or force) without moving the strand relative to the anchorage by adjusting the nut on the threaded socket.
- Surface of anchorage is with galvanization and painting for corrosion protection. Stable and durable filler are filled inside of anchorage to provide good corrosive protection on anchoring and tensile elements;
- Good water tightness performance by being installed with sealing device.
- Circular arc being set out at deviating entrance area to avoid stress concentration on strandsand anchorage.

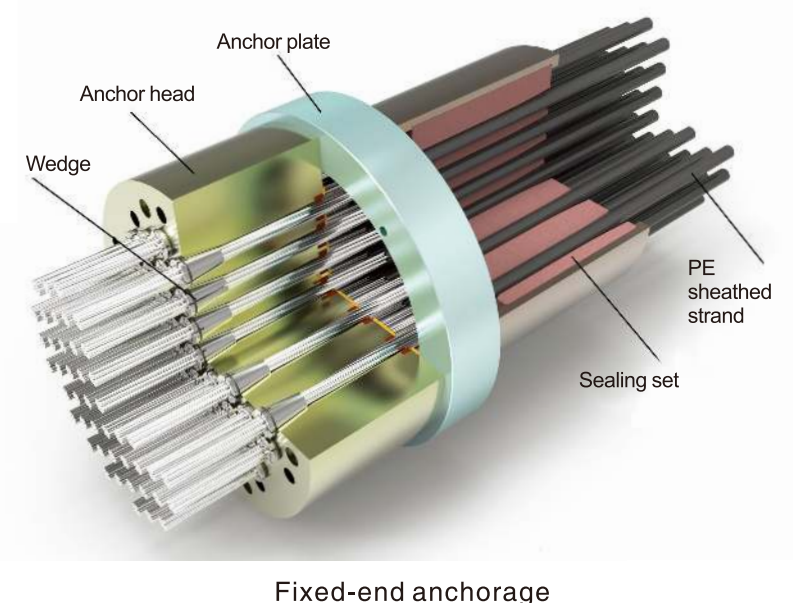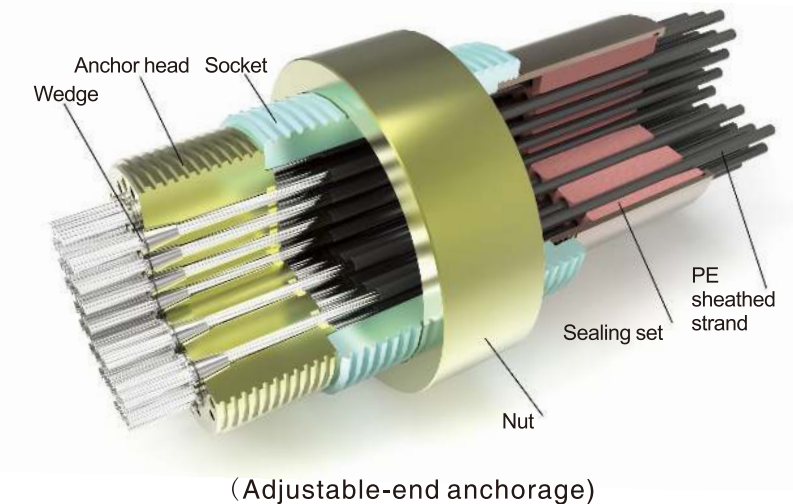

Tests

Wonderful tensile and Fatigue performance

OVM multi-strand stay cable system has been consistently improved on the basis of numerous tests conducted at independent laboratories at home and abroad, such as CTL USA and EMPA Switzerland. It is a qualified system with wonderful tensile and fatigue performance according to the latest Setra CIP, fib bulletin 89 (30) and PTI recommendations.



OVM250-139 stay cable assembly being tested at CTL, USA

Fatigue & Subsequent Tensile Testing of OVM250-139 Stay Cable System

- Reference criteria: fib bulletin 30, Acceptance of stay cable systems using prestressing steels(2005).
- Protected and sheathed galvanized strand with a nominal diameter of 15.24mm and a GUTS of 1860 MPa.
- Under an upper stress of 45% GUTS, the suffered fatigue amplitude of 250MPa in the test is much higher than the stress range of 200MPa specified in Setra CIP and fib bulletin 30 (or 89) and 159MPa in PTI recommendations.

Fatigue & Subsequent Tensile Testing of OVM250-156 Stay Cable System

- Reference criteria: fib Bulletin 30, Acceptance of stay cable systems using prestressing steels (2005).
- Protected and sheathed galvanized strand with a nominal diameter of 15.7mm and a GUTS of 1860 MPa.
- 45% GUTS, 200MPa stress amplitude, 2 million fatigue cycles.




Watertightness performance

A large number of bridges revealed that the greatest amount of cable corrosion occurred at lower anchorages due to weak watertight properties. OVM multi-strand stay cable systems have been tested for their dynamic watertight performance and have been proven to comply with the latest CIP, fib and PTI recommendations.



OVM250 Main Data

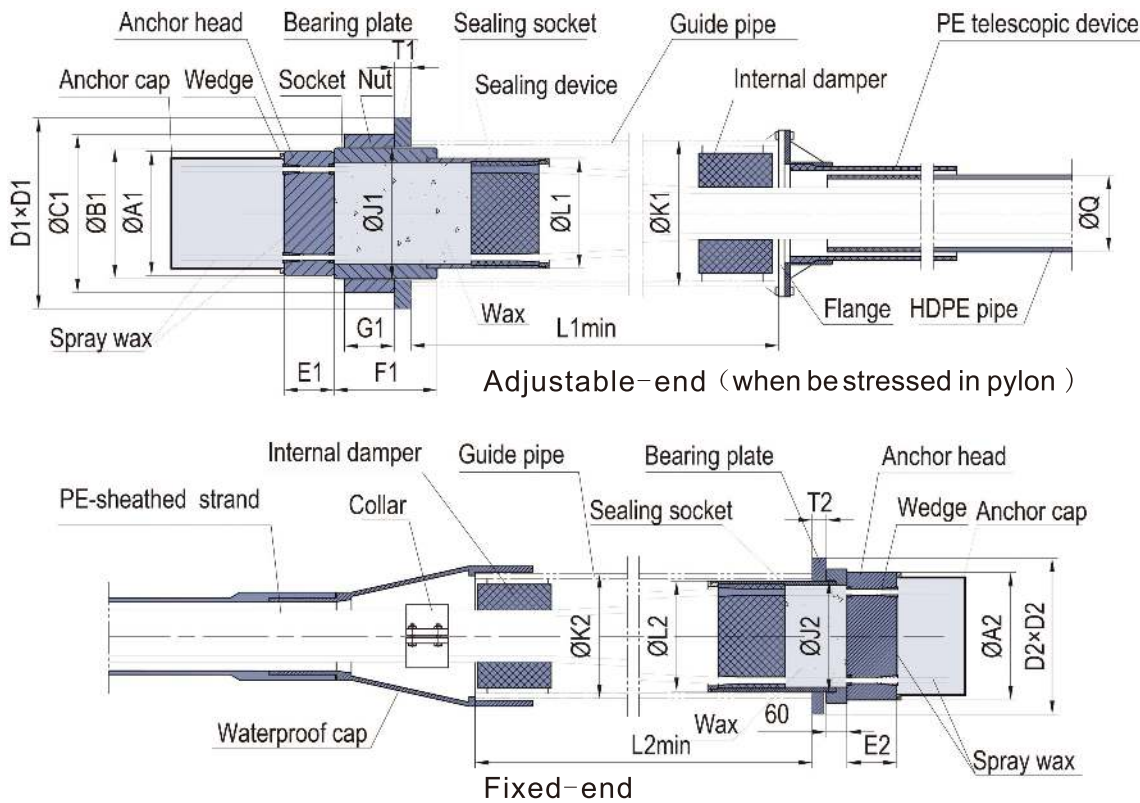

Designation	Stand No.	15.2 strand		15.7 strand		Stressing equipment
		Nominal breaking load (kN)	Max admissible load 0.45 F _{0.45} (kN)	Nominal breaking load (kN)	Max admissible load 0.45 F _{0.45} (kN)	
OVM250-12	12	3125	1406	3348	1507	YDCS3000
OVM250-19	19	4947	2226	5301	2385	
OVM250-22	22	5729	2578	6138	2762	
OVM250-27	27	7031	3164	7533	3390	
OVM250-31	31	8072	3632	8649	3892	YDCS5500
OVM250-34	34	8853	3984	9486	4269	
OVM250-37	37	9635	4335	10323	4645	
OVM250-43	43	11197	5038	11997	5399	
OVM250-55	55	14322	6445	15345	6905	YDCS8000 YCW800
OVM250-61	61	15884	7148	17019	7659	
OVM250-73	73	19009	8554	20367	9165	
OVM250-85	85	22134	9960	23715	10672	
OVM250-91	91	23696	10663	25389	11425	YCW1500
OVM250-109	109	28383	12772	30411	13685	
OVM250-127	127	33070	14881	35433	15945	
OVM250-139	139	36195	16288	38781	17451	
OVM250-151	151	39320	17694	42129	18958	custom-made
OVM250-160	160	41664	18749	44640	20088	

Note:The strand grade is 1860MPa

	Adjustable-end												HDPE pipe	Fixed-end										CCT sensor
Dimension Designation	Anchor head		Socket		Nut		Sealing socket	Bearing plate			Guide pipe			Anchor head		Anchor plate	Sealing socket	Bearing plate			Guide pipe			
	φ A1	E1	φ B1	F1	φ C1	G1	φ L1	D1	φ J1 (Hole)	T1	φ K1 (O.D./W.T.)	L1 min		φ Q (O.D.)	φ A2	E2	φ B2	φ L2	D2	φ J2 (hole)	T2	φ K2 (O.D./W.T.)	L2 min	
OVM250-12	φ190	80	φ205	200	φ265	80	φ165	345	φ215	35	φ245/10	1300	φ125	φ200	80	φ215	φ165	315	φ171	45	φ194/8	1200	3 sets CCT sensor can be fixed in each cable, which can be changed according to requirement	
OVM250-19	φ225	90	φ240	225	φ300	90	φ195	380	φ250	40	φ273/10	1650	φ140	φ235	90	φ250	φ195	350	φ201	50	φ219/8	1500		
OVM250-22	φ240	95	φ255	240	φ320	95	φ210	415	φ265	40	φ299/10	1900	φ140	φ250	95	φ265	φ210	370	φ216	50	φ245/10	1800		
OVM250-27	φ270	110	φ285	260	φ350	105	φ230	435	φ295	40	φ325/10	2000	φ160	φ270	110	φ285	φ230	395	φ236	55	φ273/8	1900		
OVM250-31	φ270	110	φ285	260	φ350	105	φ230	460	φ295	50	φ325/10	2000	φ160	φ270	110	φ285	φ230	405	φ236	60	φ273/8	1900		
OVM250-34	φ285	110	φ310	280	φ375	110	φ250	490	φ320	55	φ356/10	2200	φ180	φ285	110	φ305	φ250	430	φ256	60	φ273/8	2050		
OVM250-37	φ285	120	φ310	280	φ375	110	φ250	490	φ320	55	φ356/10	2200	φ180	φ285	120	φ305	φ250	430	φ256	60	φ273/8	2050		
OVM250-43	φ310	125	φ330	310	φ400	125	φ280	520	φ340	60	φ377/10	2450	φ200	φ320	130	φ340	φ280	510	φ286	75	φ325/10	2300		
OVM250-55	φ330	140	φ350	340	φ430	135	φ292	580	φ360	60	φ406/10	2550	φ200	φ340	140	φ360	φ292	550	φ298	80	φ325/10	2400		
OVM250-61	φ360	145	φ380	370	φ460	145	φ320	600	φ390	70	φ426/12	2750	φ235	φ370	145	φ390	φ320	590	φ326	85	φ356/10	2600		
OVM250-73	φ380	155	φ400	390	φ490	155	φ345	640	φ410	75	φ457/12	2850	φ260	φ400	160	φ420	φ345	650	φ351	90	φ377/10	2700		
OVM250-85	φ400	175	φ420	440	φ520	175	φ365	700	φ430	80	φ457/12	3000	φ260	φ420	175	φ440	φ365	680	φ371	100	φ406/10	2800		
OVM250-91	φ430	180	φ450	460	φ550	185	φ385	750	φ470	85	φ508/15	3200	φ280	φ450	190	φ475	φ385	730	φ391	110	φ426/10	3000		
OVM250-109	φ450	210	φ480	530	φ590	210	φ405	790	φ490	100	φ530/15	3400	φ315	φ470	210	φ495	φ405	780	φ411	120	φ457/10	3150		
OVM250-127	φ500	210	φ530	550	φ640	220	φ445	850	φ540	110	φ610/15	3750	φ315	φ530	220	φ560	φ445	850	φ451	130	φ480/12	3500		
OVM250-139	φ530	260	φ560	600	φ680	230	φ470	980	φ575	130	φ610/15	3850	φ315	φ560	250	φ590	φ470	890	φ476	140	φ508/15	3550		
OVM250-151	φ600	270	φ600	600	φ730	240	φ510	1050	φ615	140	φ660/15	3950	φ355	φ600	280	φ630	φ510	950	φ516	140	φ560/15	3650		
OVM250-163	φ600	270	φ600	600	φ730	240	φ510	1050	φ615	140	φ660/15	4050	φ355	φ600	280	φ630	φ510	950	φ516	140	φ560/15	3800		


- Note:
- OVM multi-strand cable systems range in size from 12 to 163 strands per anchorage. The larger capacity can be customized to the client's requirements .
 - The dimensions of the guide pipe and the bearing plates are based on the concrete structure and they shall be adjusted if the bridge is a steel structure.
 - In general, bearing plates and guide pipes are not included in the OVM supply, but may be provided on the client's request.

OVMAT Stay Cable System for Extradosed Bridges

The Extradosed Bridge combines the features of a cable-stayed bridge and a continuous girder bridge. The load on the bridge is resisted by both cables and girders. It features economy, aesthetics, good rigidity and easier construction, etc.

The first extradosed bridge was built in Japan in 1994. OVM subcontracted the very first extradosed bridge (Zhangzhou Zhanbei Bridge) in China in 2001. With continuous improvements on it, OVMAT Stay Cable enjoys technical and economic advances and has won high and wide recognition. OVM has involved in construction of 200+ extradosed bridges world wide since 2001. Through this, OVM has accumulated rich experience in cable system design, supply and application, and bridge construction and management.

The OVMAT stay cable system builds on the outstanding performance of the OVM250 multi-strand stay cable system. By successfully employing an innovative patented individual tube saddle with individual strands that pass through the saddle intact, the PE sheathed strands are well-maintained in terms of their anti-corrosion properties and the stress conditions around the saddle in the pylon are significantly improved. OVM's patented anti-slip device fits on one side of the saddle, effectively transferring the differential force of the cable to the pylon. OVMAT stay cable system is individually strand adjustable and replaceable.

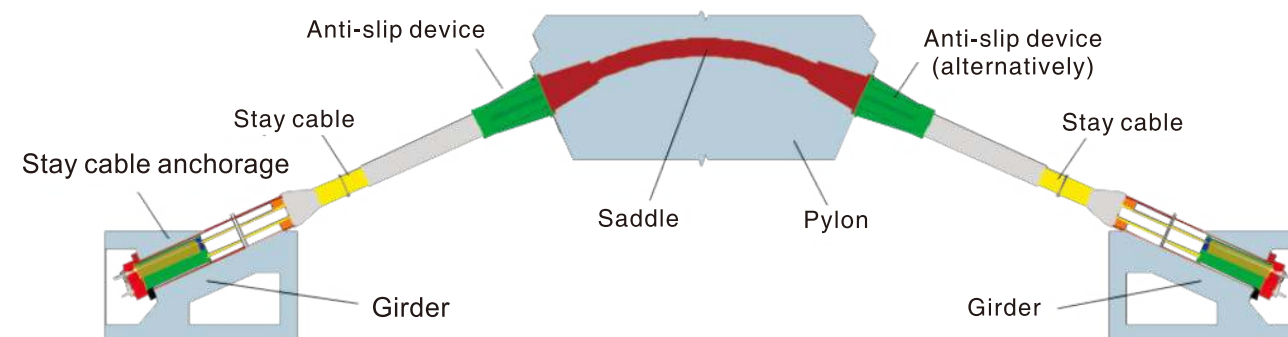

Anti-slip device

Advantages

- Each strand is individually placed in the saddle tube and parallel to each other.
- Each strand is held in place by an anti-slip key.
- It can resist and transfer differential forces over the lifetime of the cable.
- The single strand is replaceable.





Xianshen River Bridge, China




Shengsi Sangiao Harbour Bridge, China

Saddle with one-side two-way anti-slip device

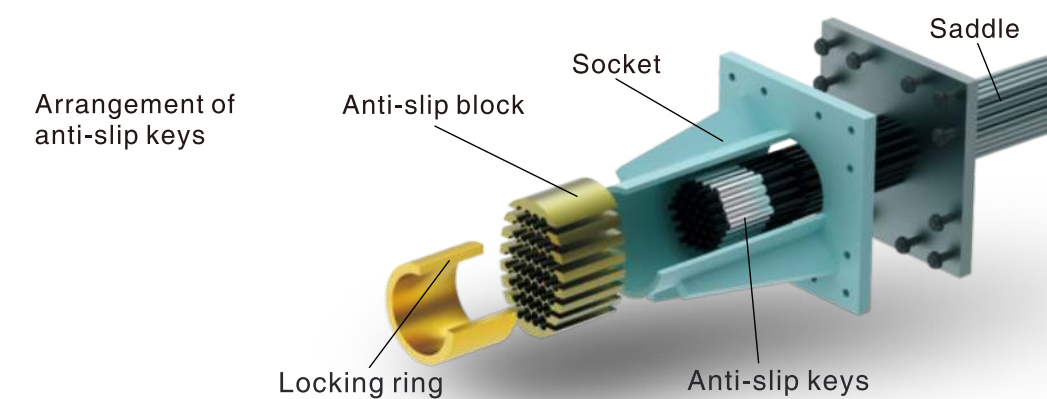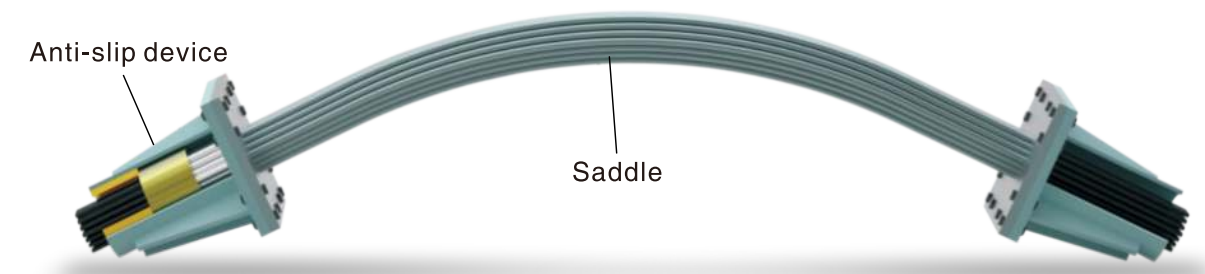


Liuzhou Sanmen River Bridge, China

OVMAT Main Data

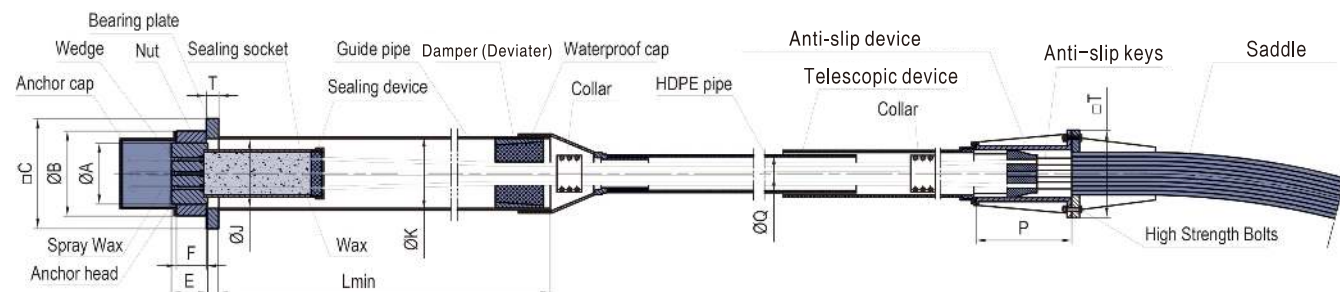

Dimension	Anchor head		Nut		Anchor cap	Bearing plate			Guide pipe		HDPE pipe	Anti-slip device	
Designation	Φ A	E	Φ B	F	Dmin	□ C	□ T	Φ J	Φ K	Lmin *	Φ Q	□ T	P
OVMAT-19	Φ 220	120	Φ 290	90	400	350	45	Φ 230	Φ 245X8	1600	Φ 160	400	420
OVMAT-22	Φ 245	125	Φ 320	95	400	390	45	Φ 255	Φ 273X9	1750	Φ 180	500	420
OVMAT-27	Φ 270	140	Φ 345	105	400	420	50	Φ 280	Φ 299X9	1950	Φ 180	500	420
OVMAT-31	Φ 270	140	Φ 345	105	450	450	55	Φ 280	Φ 299X9	1950	Φ 200	500	420
OVMAT-37	Φ 285	150	Φ 360	110	450	480	60	Φ 295	Φ 325X10	2000	Φ 200	500	420
OVMAT-43	Φ 310	160	Φ 395	125	450	520	65	Φ 320	Φ 351X10	2300	Φ 240	550	420
OVMAT-55	Φ 330	170	Φ 420	135	450	570	75	Φ 340	Φ 377X10	2450	Φ 240	550	420
OVMAT-61	Φ 360	175	Φ 450	145	450	600	75	Φ 370	Φ 402X10	2650	Φ 260	550	420
OVMAT-73	Φ 380	190	Φ 480	155	450	650	85	Φ 390	Φ 406X10	2800	Φ 280	600	420
OVMAT-91	Φ 430	215	Φ 540	185	450	790	90	Φ 450	Φ 480X15	3150	Φ 280	650	420
OVMAT-109	Φ 450	240	Φ 570	210	450	790	100	Φ 470	Φ 500X15	3300	Φ 315	650	420
OVMAT-127	Φ 510	260	Φ 640	230	450	860	105	Φ 530	Φ 560X15	3700	Φ 340	650	420
OVMAT-139	Φ 560	280	Φ 700	250	450	950	115	Φ 580	Φ 610X15	3750	Φ 340	650	420

Remarks: 1、 Guide pipe should be stretched outside the surface of deck at least 500mm in the vertical direction.
2、 The figures in brackets are for type anti-slipping key

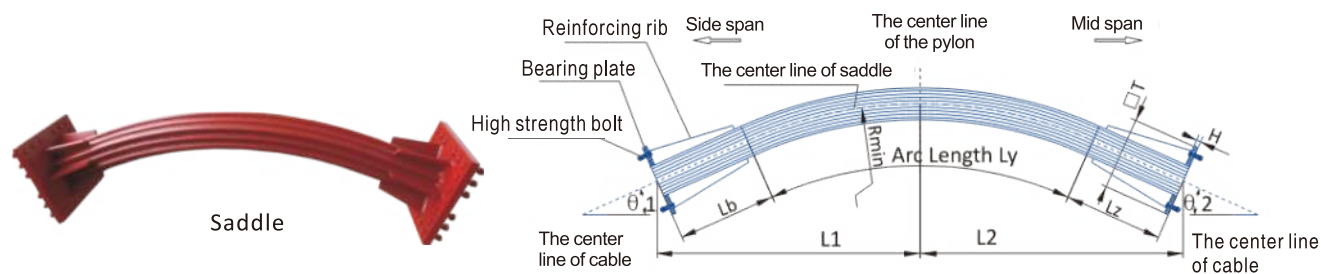

Dimension	Bearing plate		Radius Rmin	On Side span			Arc length Ly	On mid span			Total length L
Designation	□ T	H		θ 1	L1	Lb		θ 2	L2	Lz	
OVMAT-19	400	30	2000								
OVMAT-22	500	35	2000								
OVMAT-27	500	35	2000								
OVMAT-31	500	35	2000								
OVMAT-37	500	35	2000								
OVMAT-43	550	45	2000								
OVMAT-55	550	45	2000								
OVMAT-61	550	45	2000								
OVMAT-73	600	50	2000								
OVMAT-91	600	50	2000								
OVMAT-109	650	55	2000								
OVMAT-127	650	55	2000								
OVMAT-139	650	60	2000								


The actual parameters will be determined based on the specific engineering design

Installation

OVM stay cable systems can be installed using the individual-strand tensoning method, a process that is monitored and automatically controlled to ensure that the forces in each strand are uniform. After all strands of a cable have been installed, an integral cable tensoning method may be performed to meet the final deck level, depending on the stress conditions of the bridge.


Operation clearance

1. Individual strand tensoning for both OVM250 and OVMAT stay cable.

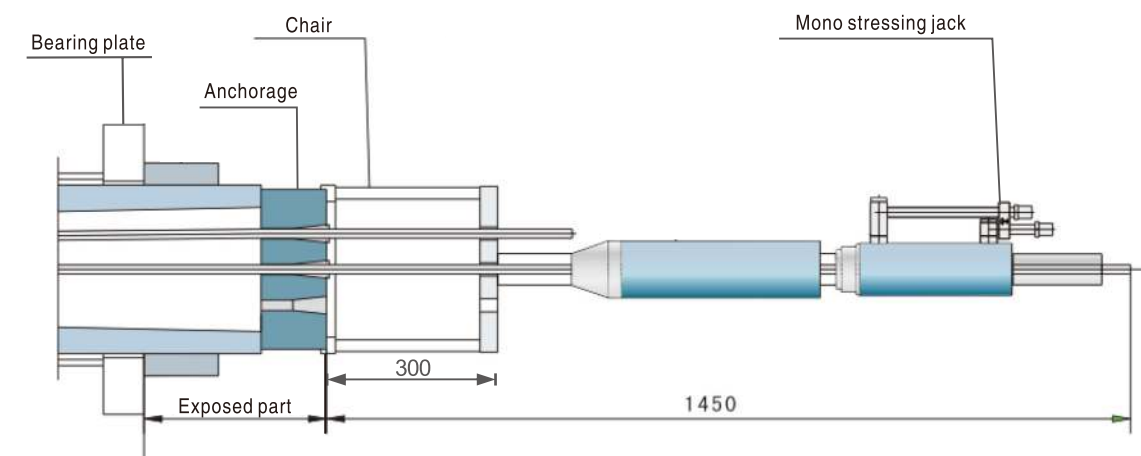


2. Integral Cable Tensoning

Integral cable tensoning clearance for OVM250 stay cable

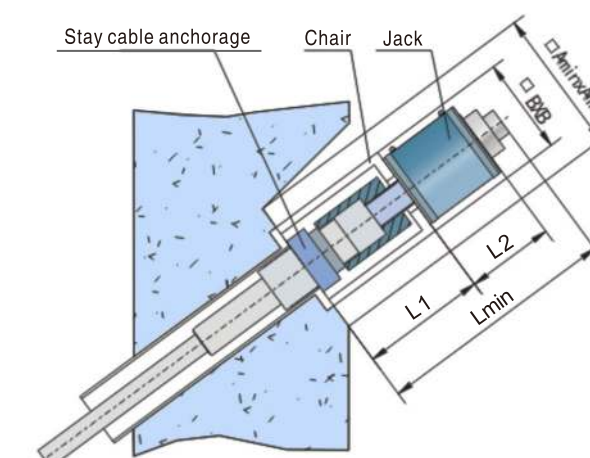

Integral tensoning clearance for YDCS jack

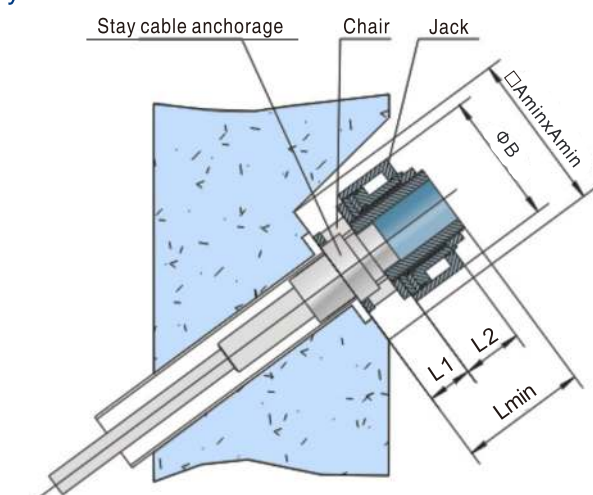

Integral tensoning clearance for YCW jack

Integral tensoning clearance (for OVM250 stay cable)

Jack	L1	L2	Lmin	AminXAmin	BXB(Φ B)
YDCS3000-150	1200	420	1800	800X800	500X500
YDCS5500-100	1200	360	1800	900X900	580X580
YDCS8000-100	1200	400	2000	1000X1000	720X720
YCW800-100	300	400	850	950X950	Φ 876
YCW1500	380	426	1020	1250X1250	Φ 1140



Monitoring

Stay cable is one of the key tension elements of cable-stayed bridge, and its tensile load is a significant indicator of bridge safety. To ensure the smooth operation and safety of cable-stayed bridges in service, OVM has comprehensive solutions to monitor the cable force during cable installation and service duration.



CCT magnetic flux sensor

OVM monitoring system is capable of automatic real-time remote monitoring on cables.



Applications

Cable-stayed bridge


BEIPANJIANG BRIDGE, CHINA, 2016

Total length: 1341m
Main span: 720m
Cable size: OVM250-22, 31, 37, 43
Strand weight: 1880 tons



ZUARI BRIDGE, GOA, INDIA, 2019

Total length: 640m
Main span: 360m
Cable size: OVM250-37, 55, 61
Strand weight: 1260 tons

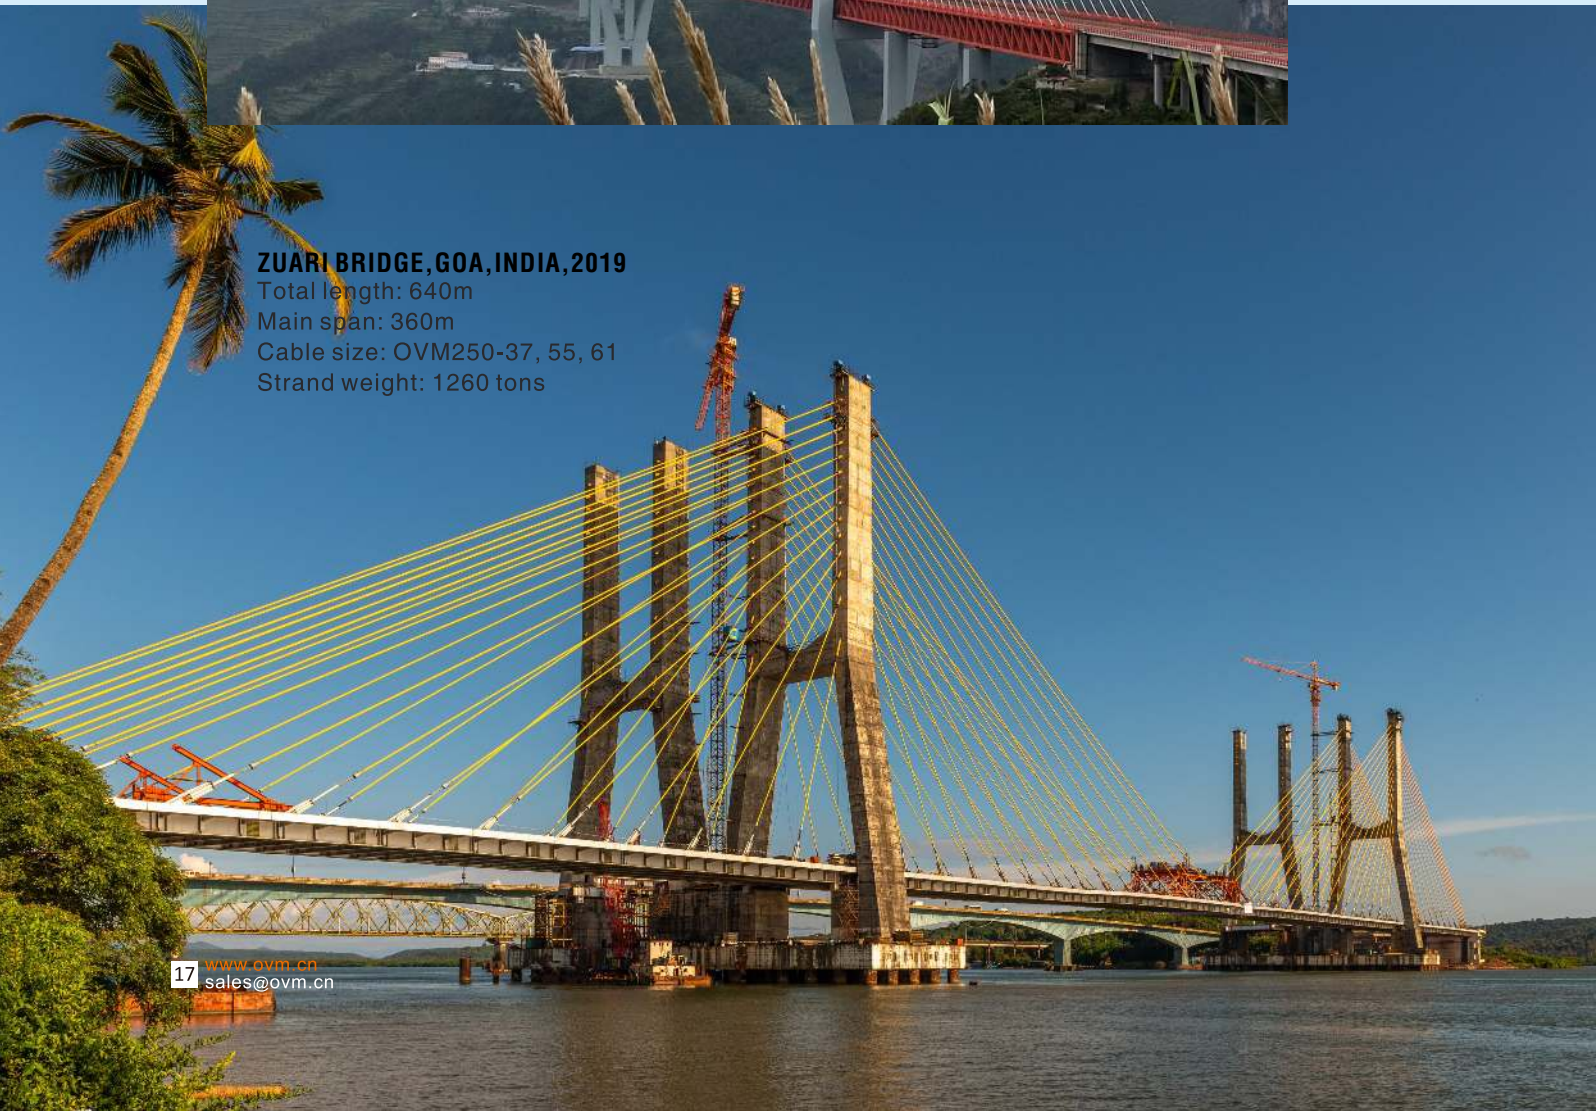

KIGAMBONI BRIDGE, TANZANIA, 2016

Total length: 400m
Main span: 200m
Cable size: OVM250-85, 91, 127, 160
Strand weight: 427 tons



LALAY BRIDGE, IRAN, 2010

Total length: 456m
Main span: 256m
Cable size: OVM250-19, 22, 27, 31
Strand weight: 205 tons

NGUYEN TAT THANH BRIDGE, VIETNAM, 2024

Total length: 752m
Main span: 100m
Cable size: OVM250-55, 61, 73, 85





YACHIHE BRIDGE, CHINA, 2016
 Total length: 1450m
 Main span: 800m
 Cable size: OVM250-43, 55, 61, 73, 85
 Strand weight: 2937 tons



BINTULU-JEPAK BRIDGE, MALAYSIA, 2025
 Total length: 3,586.23m
 Main span: 267.6m
 Cable size: OVM250A-34, 37, 43, 55, 61, 73, 85

ROD-EL-FARAG BRIDGE, EGYPT, 2019

Total length: 540m
 Main span: 300m
 Cable size: OVM250-55, 61, 73, 85, 91, 109, 127
 Strand weight: 1200 tons



**TANZI SECTION C714 FENGYUAN
 CONNECTING BRIDGE, TAIWAN
 CHINA, 2021**
 Main span: 117m
 Cable size: OVM250-43, 55



MAHATMA BRIDGE, INDIA, 2017

Total length: 240m
 Main span: 99m
 Cable size: OVM250-19, 31
 Strand weight: 17.5 tons

NAN'AO WUTA BRIDGE, TAIWAN CHINA, 2015

Total length: 360m
 Main span: 160m
 Cable size: OVM250-43
 Strand weight: 96 tons



THE 4TH KUM-KANG BRIDGE, KOREA, 2014


Total length: 840m
Main span: 370m
Cable size: OVM250-37, 55, 61, 73, 85
Strand weight: 770 tons



Extradosed Bridge


CHAORYANG BRIDGE, CHINA, 2015

Total length: 908m
Main span: 150m
Cable size: OVMAT-55, 61, 73, 85, 109

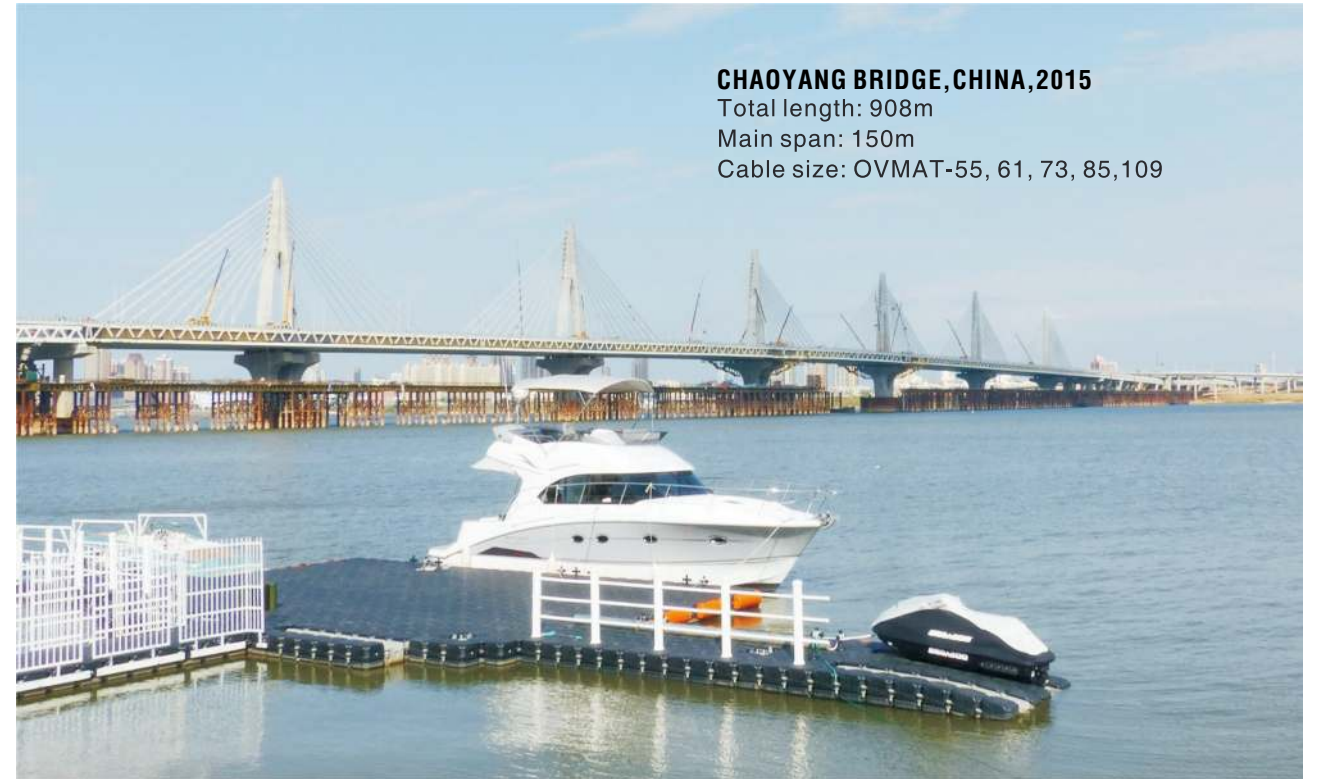

TONGLING RAIL-CUM-ROAD CHANJIANG RIVER BRIDGE, CHINA, 2015

Total length: 6000m
Main span: 630m
Cable size: OVM250-61, 73, 85, 91, 109, 127

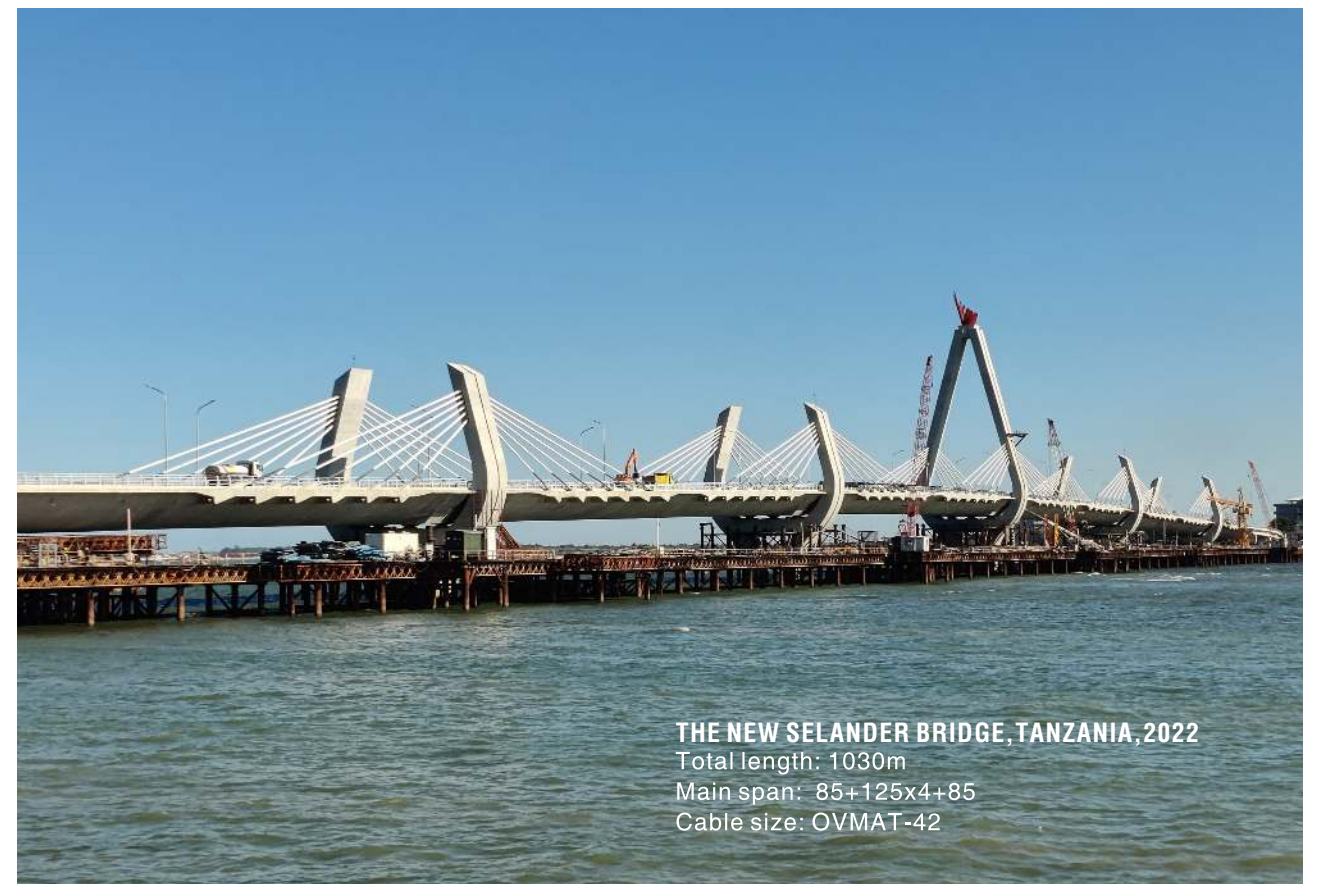

THE NEW SELANDER BRIDGE, TANZANIA, 2022

Total length: 1030m
Main span: 85+125x4+85
Cable size: OVMAT-42

